

INSTALLATION GUIDE

SP1056 Hydrostatic Relief Valve

The Hydrostatic Relief Valve is to be used with the internal 1 1/2" NPT or 2" NPT in a sump along with the SP1055 Slotted Collector tube on the bottom of the sump.

Basic safety precautions should always be followed, including the following: Failure to follow instructions can cause severe injury or death.

- ▲ This is the safety-alert symbol. When you see this symbol on your equipment or in this manual, look for one of the following signal words and be alert to the potential for personal injury.
- ▲ **WARNING** warns about hazards that **could** cause serious personal injury, death or major property damage and if ignored presents a potential hazard.



▲ **WARNING - Read and follow and understand all instructions in this Installation Guide. Failure to follow instructions can cause severe injury and/or death.**

▲ **WARNING – Suction Entrapment Hazard.**

Suction in suction outlets and/or suction outlet covers which are damaged, broken, cracked, missing, or unsecured can cause severe injury or death due to the following entrapment hazards:



Hair Entrapment- Hair becomes knotted or snagged in an outlet cover.



Limb Entrapment- A limb sucked or inserted into an opening of a circulation outlet with a broken or missing cover in the pool resulting in a mechanical bind or swelling



Body Suction Entrapment- Suction applied to a large portion of the body or limbs resulting in an entrapment.




Evisceration/ Disembowelment Entrapment- Suction applied directly to the intestines through an unprotected sump or suction outlet with a missing or broken cover.



Mechanical Entrapment- Potential for jewelry, swimsuit, hair decorations, finger, toe or knuckle to be caught in an opening of an outlet or cover.

Use TFE to seal threaded connections on molded plastic components. **NOTE: Do NOT use Plumber's Pipe Dope as it may cause cracking of the plastic components.** When applying TFE tape to plastic threads, wrap the entire threaded portion of the male fitting with one to two layers of tape. Wind the tape clockwise as you face the open end of the fitting, beginning at the end of the fitting. It is only necessary to tighten fittings enough to prevent leakage. Tighten fitting by hand and then use a tool **SP1056T** to engage fitting a maximum of an additional 1 1/2 turns. Use care when using TFE tape as friction is reduced considerably; **do NOT over-tighten** fitting or you may cause damage. If leaks occur, remove fitting, clean off old TFE tape, rewrap with one to two additional layers of Teflon tape, and re-install.

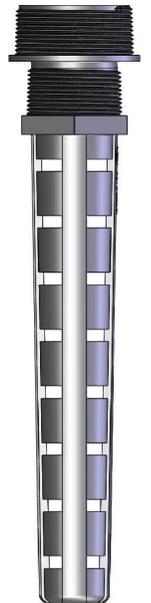

SP1055

The Slotted Collector Tube SP1055 comes with both 2" and 1 1/2" NPT threads. If the Sump is has a 1 1/2" NPT the 2" NPT must be cut off of the SP1055.

SAVE THESE INSTRUCTIONS.

Hayward Pool Products
620 Division Street, Elizabeth, NJ 07207
Phone: (908) 355-7995
www.hayward.com