

CERTIFICATION OF COMPLIANCE

Contains: WG1031BLV Description: 9" x 9" Suction Outlet Cover

Ratings: Floor: 190 GPM Wall: 108 GPM Open Area: 45.82 sq-in
Certified to Comply with Section 1404 of the Virginia Graeme Baker Act (VGB) Pool & Spa Safety Act codified at 16 CFR part 1450. Initial Certification May 2011.

Manufactured: After September 10, 2009, by Division of Hayward Industries, Inc. at K4-A, 214028 Block K4- A, Export Processing Zone Wuxi New District Jiangsu Province PRC 214028, China.
Certified by Hayward Pool Products, 620 Division Street, Elizabeth, NJ 07207, Phone 908-355-7995
Contact at www.hayward.com

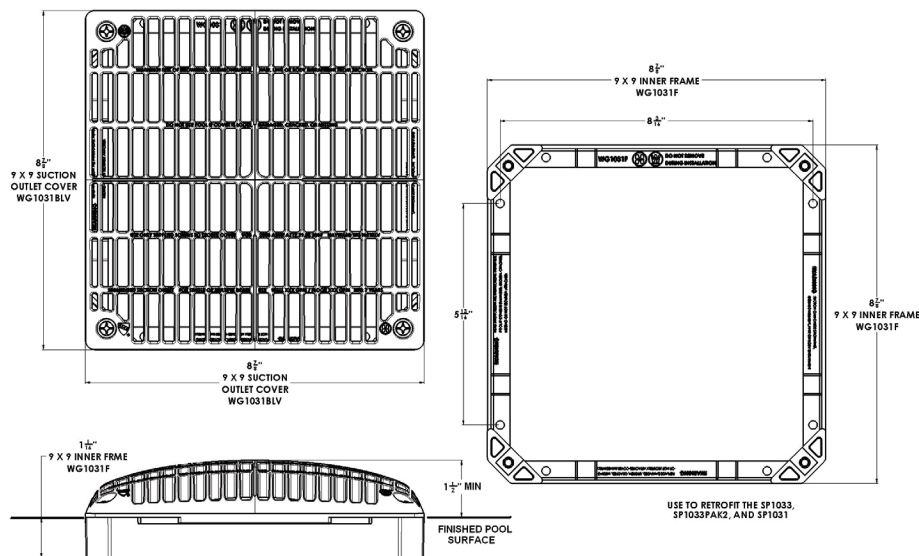
Record Custodian is Customer Service at www.hayward.com.
Hayward Pool Products P.O. Box 5100 Clemmons, NC 27012-5100, Phone: 336-712-9900
<http://www.hayward-pool.com/pdf/literature/9x9lowcoc.pdf>

Date of Mfr: The Lot Number shown on the product label contains the Year & Month of manufacture. The first number represents the year (ex 1 = 2011) and the second character the month (A=Jan, B=Feb, H=Aug, I is skipped, J=Sep, etc)

Tested to APSP 16 2011 per Section 1404 of the Virginia Graeme Baker Act (VGB) Pool & Spa Safety Act. Tested by IAPMO, 5001 E. Philadelphia Street, Ontario, CA 91761 (909)- 472-4100 in April 2011. Certificate at: http://pld.iapmo.org/file_info.asp?file_no=0006353

Date of Installation: _____
Suction outlet components have a finite life, the cover/grate should be inspected frequently and replaced at least every **7 years** or if found to be damaged, broken, cracked, missing, or not securely attached.

Hayward Pool Products acknowledges that it is a federal crime to knowingly and willingly make materially false, fictitious, or fraudulent statements, representations, or omissions on this certification.

**▲ Warning – Suction Entrapment Hazard.**

Suction in suction outlets and/or suction outlet covers which are installed in a small area and/or below the surrounding surface can cause severe injury or death due to body entrapment hazard.

To reduce the risk of body entrapment, installation of the field fabricated sumps must be such that the top of the mounted cover is a minimum of 1 1/2" above the finished pool surface over an area larger than 40" on a diagonal.